

Estimate For



ABC SUPPLY #338 ORONOCO

3750-85TH ST NW
 ORONOCO, MN 55960
 Email: fred.willetts@abcsupply.com
 Phone: 507.367.2685
 Date: 8 April 2016

metal sales
 manufacturing corporation




Roof Take-Off

Job: Example Report

Summary of Lengths, Areas and Pitches

Total Area (Ft²)	481.00	Valleys (Ft)	0.00
Primary Pitch(s)	6.00/12, 9.00/12	Parapets (Ft)	0.00
Ridges (Ft)	4.00	Pitch-Change (Ft)	0.00
Hips (Ft)	56.85	Peak-Cap (Ft)	0.00
Rakes (Ft)	0.00	Sidewall Flashing (Ft)	0.00
Drip-Edge/Eaves (Ft)	80.00	Endwall Flashing (Ft)	0.00

Plan Image

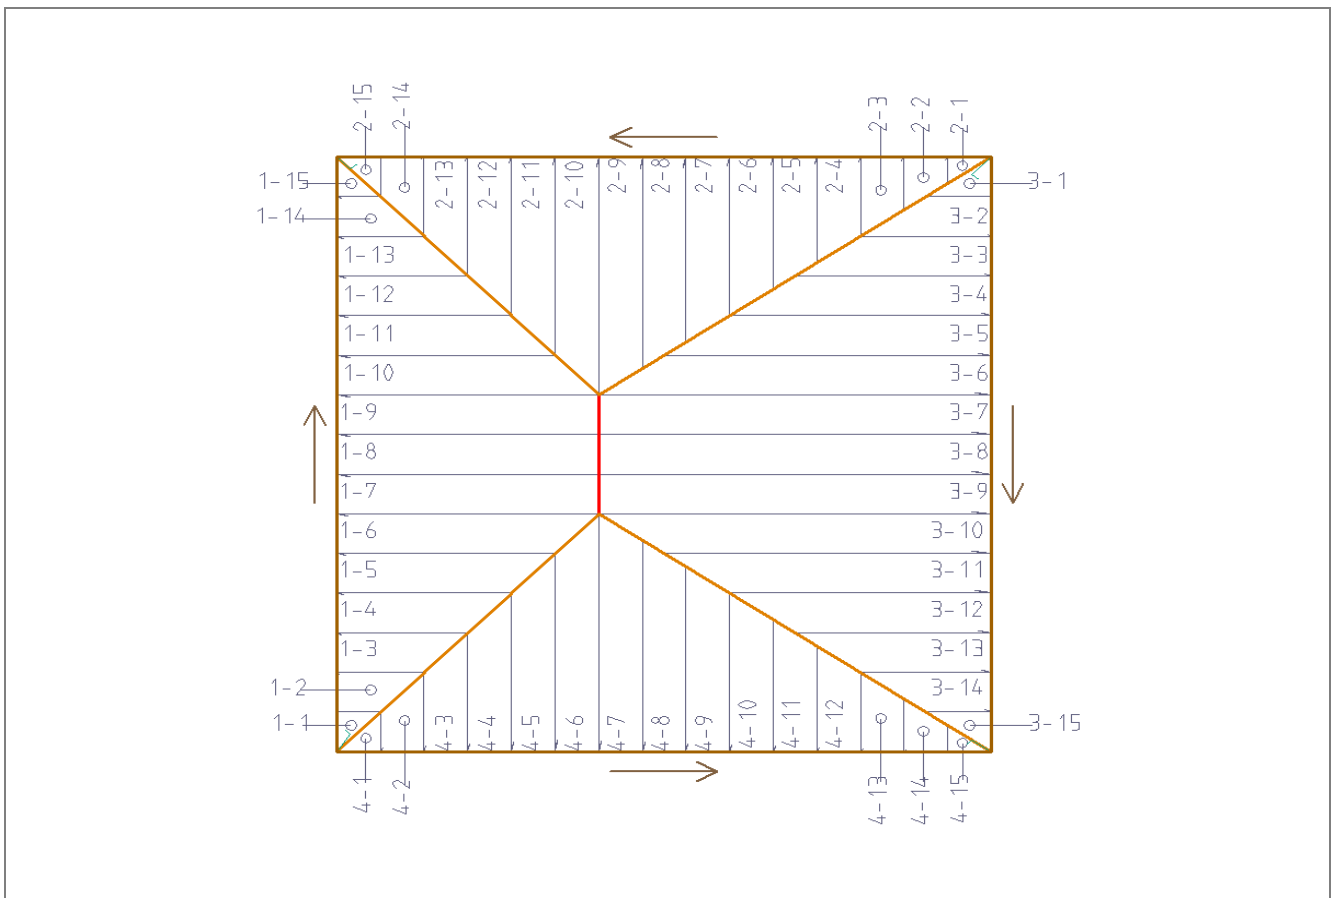

Estimate For



ABC SUPPLY #338 ORONOCO

3750-85TH ST NW
ORONOCO, MN 55960
Email: fred.willetts@abcsupply.com
Phone: 507.367.2685
Date: 8 April 2016


metal sales
manufacturing corporation



Roof Take-Off

Job: Example Report

3D Image

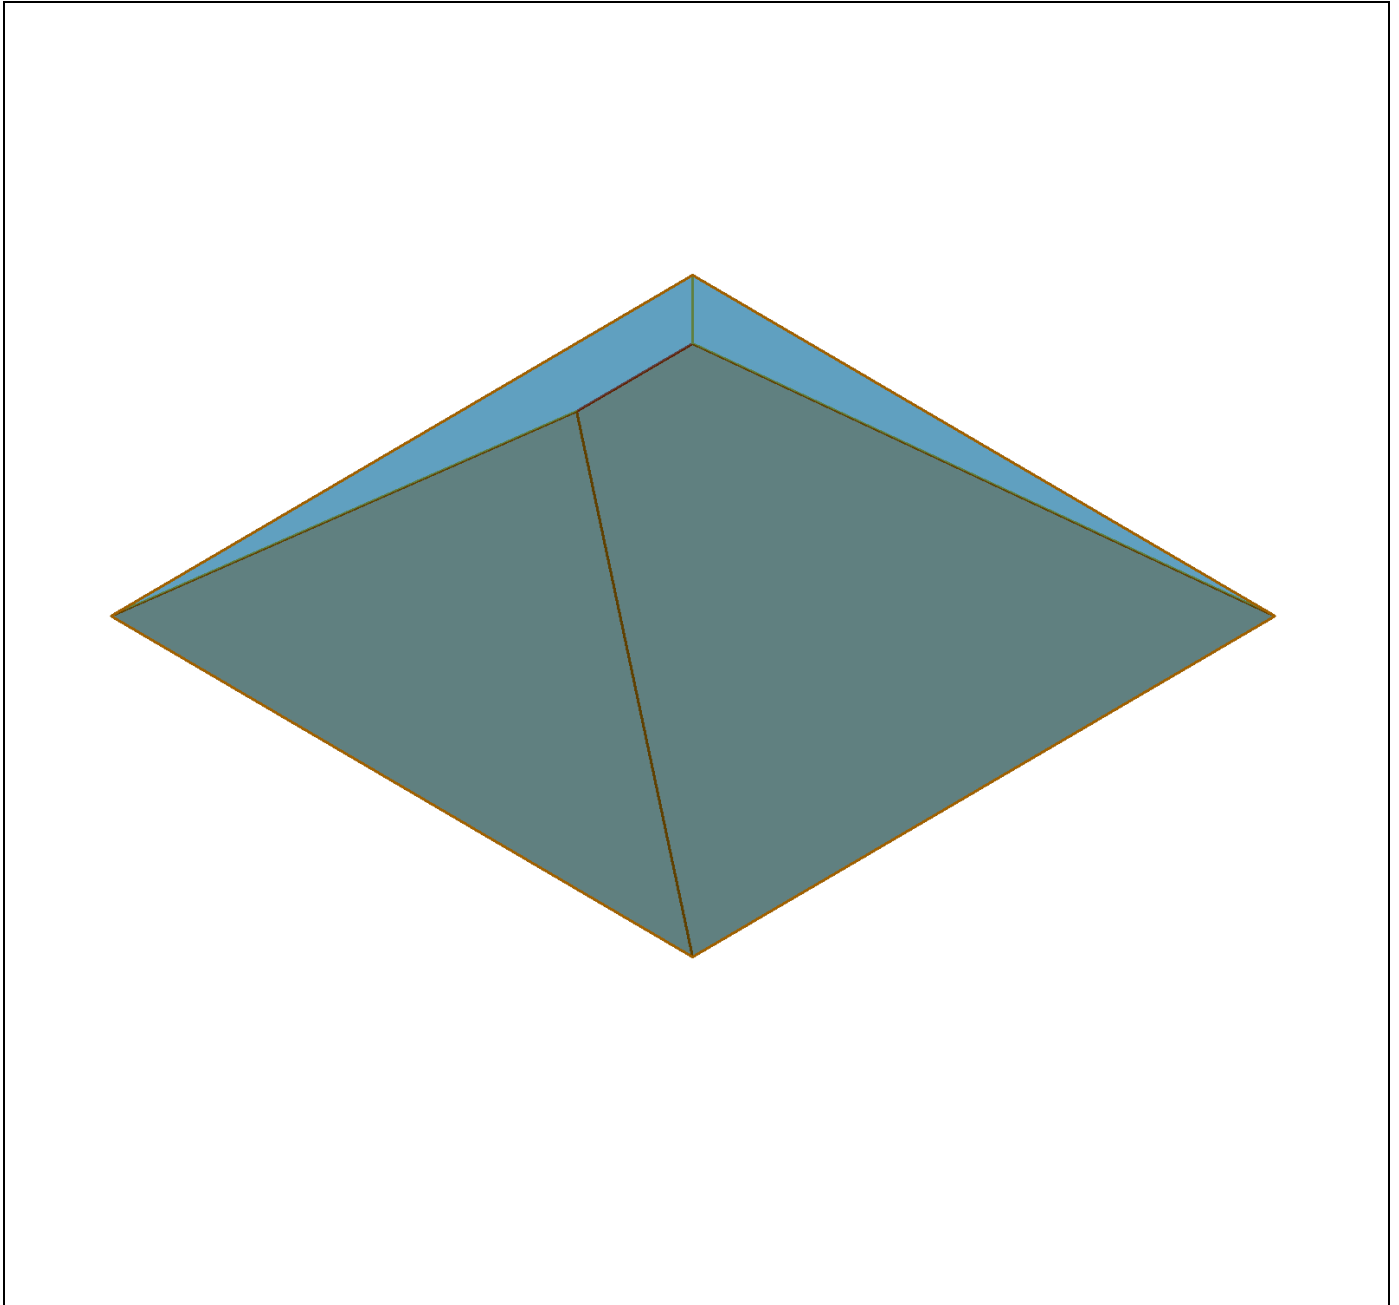

Estimate For



ABC SUPPLY #338 ORONOCO
3750-85TH ST NW
ORONOCO, MN 55960
Email: fred.willetts@abcsupply.com
Phone: 507.367.2685
Date: 8 April 2016


metal sales
manufacturing corporation



Roof Take-Off

Job: Example Report

Dimension Diagram

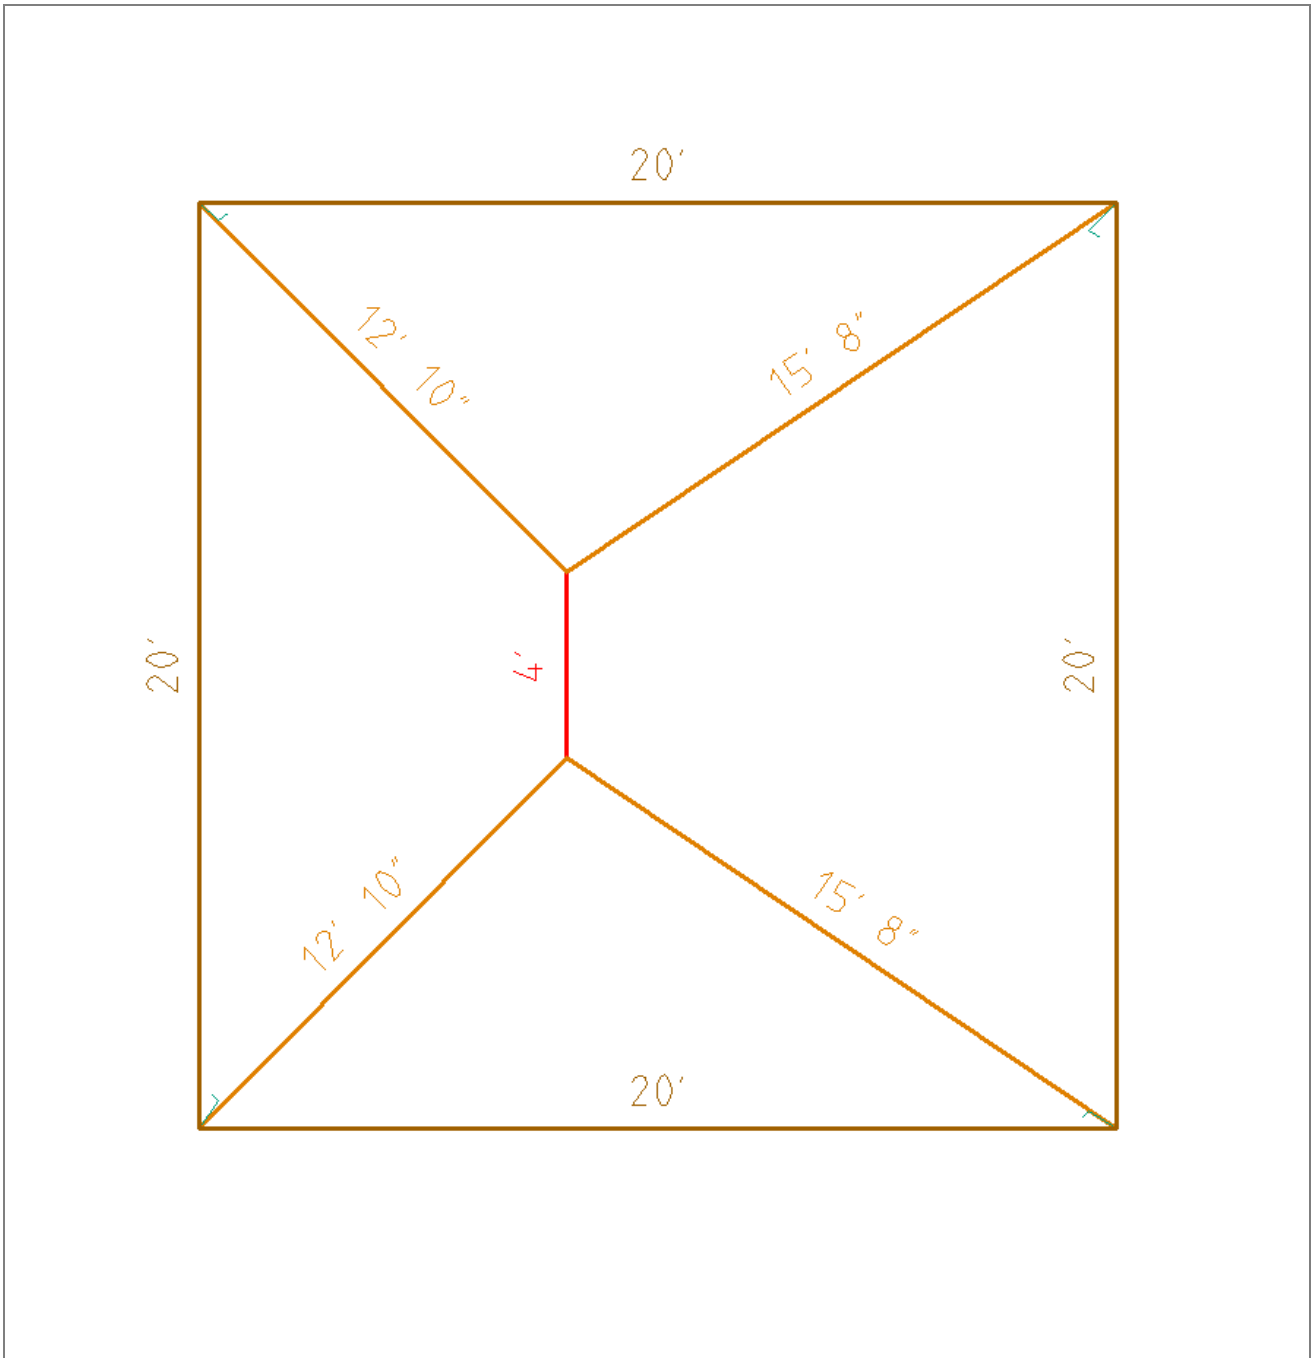

Estimate For



ABC SUPPLY #338 ORONOCO

3750-85TH ST NW
ORONOCO, MN 55960
Email: fred.willetts@abcsupply.com
Phone: 507.367.2685
Date: 8 April 2016


metal sales
manufacturing corporation



Roof Take-Off

Job: Example Report

Length Diagram

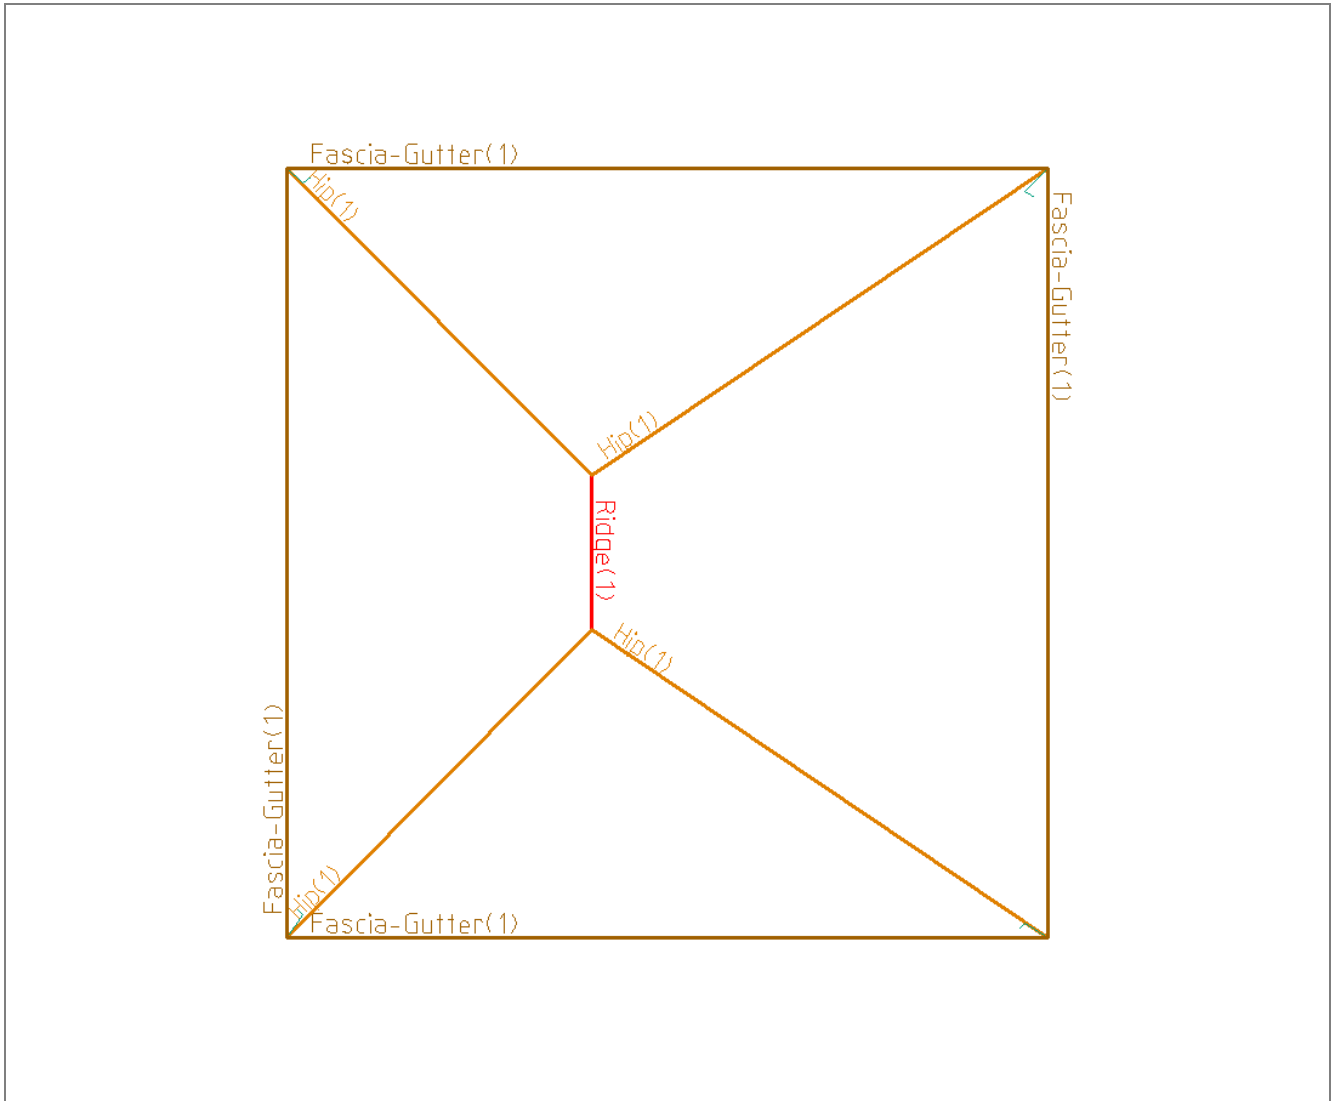

Total Line Lengths:

Ridges = 4.00 ft

Hips = 56.85 ft

Valleys = 0.00 ft

Rakes = 0.00 ft

Eaves = 80.00 ft

SideWall (Step) = 0.00 ft

EndWall (Apron) = 0.00 ft

Parapets = 0.00 ft

Change of Pitch = 0.00 ft

Box Gutter = 0.00 ft

Peak (MonoRidge) = 0.00 ft

Estimate For



ABC SUPPLY #338 ORONOCO

3750-85TH ST NW
ORONOCO, MN 55960
Email: fred.willetts@abcsupply.com
Phone: 507.367.2685
Date: 8 April 2016


metal sales
manufacturing corporation



Roof Take-Off

Job: Example Report

Slope Diagram

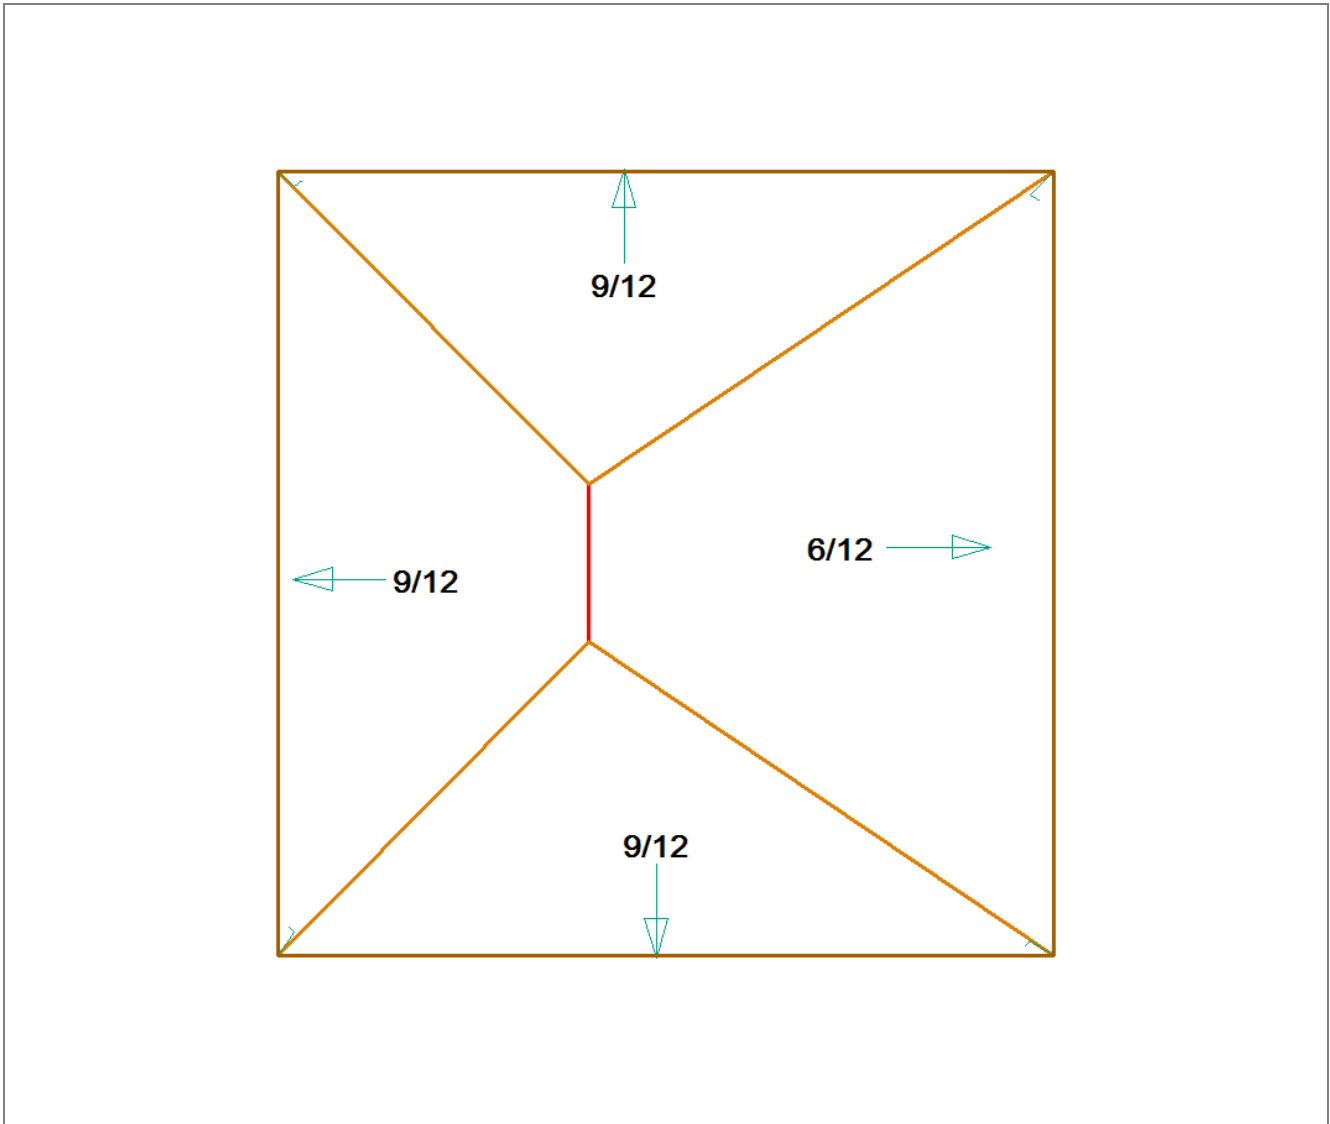

Pitch/Slope	Area
6/12	161.0ft ²
9/12	320.0ft ²
Total	481.0ft²

Estimate For



ABC SUPPLY #338 ORONOCO
3750-85TH ST NW
ORONOCO, MN 55960
Email: fred.willetts@abcsupply.com
Phone: 507.367.2685
Date: 8 April 2016


metal sales
manufacturing corporation



Roof Take-Off

Job: Example Report

Area Diagram

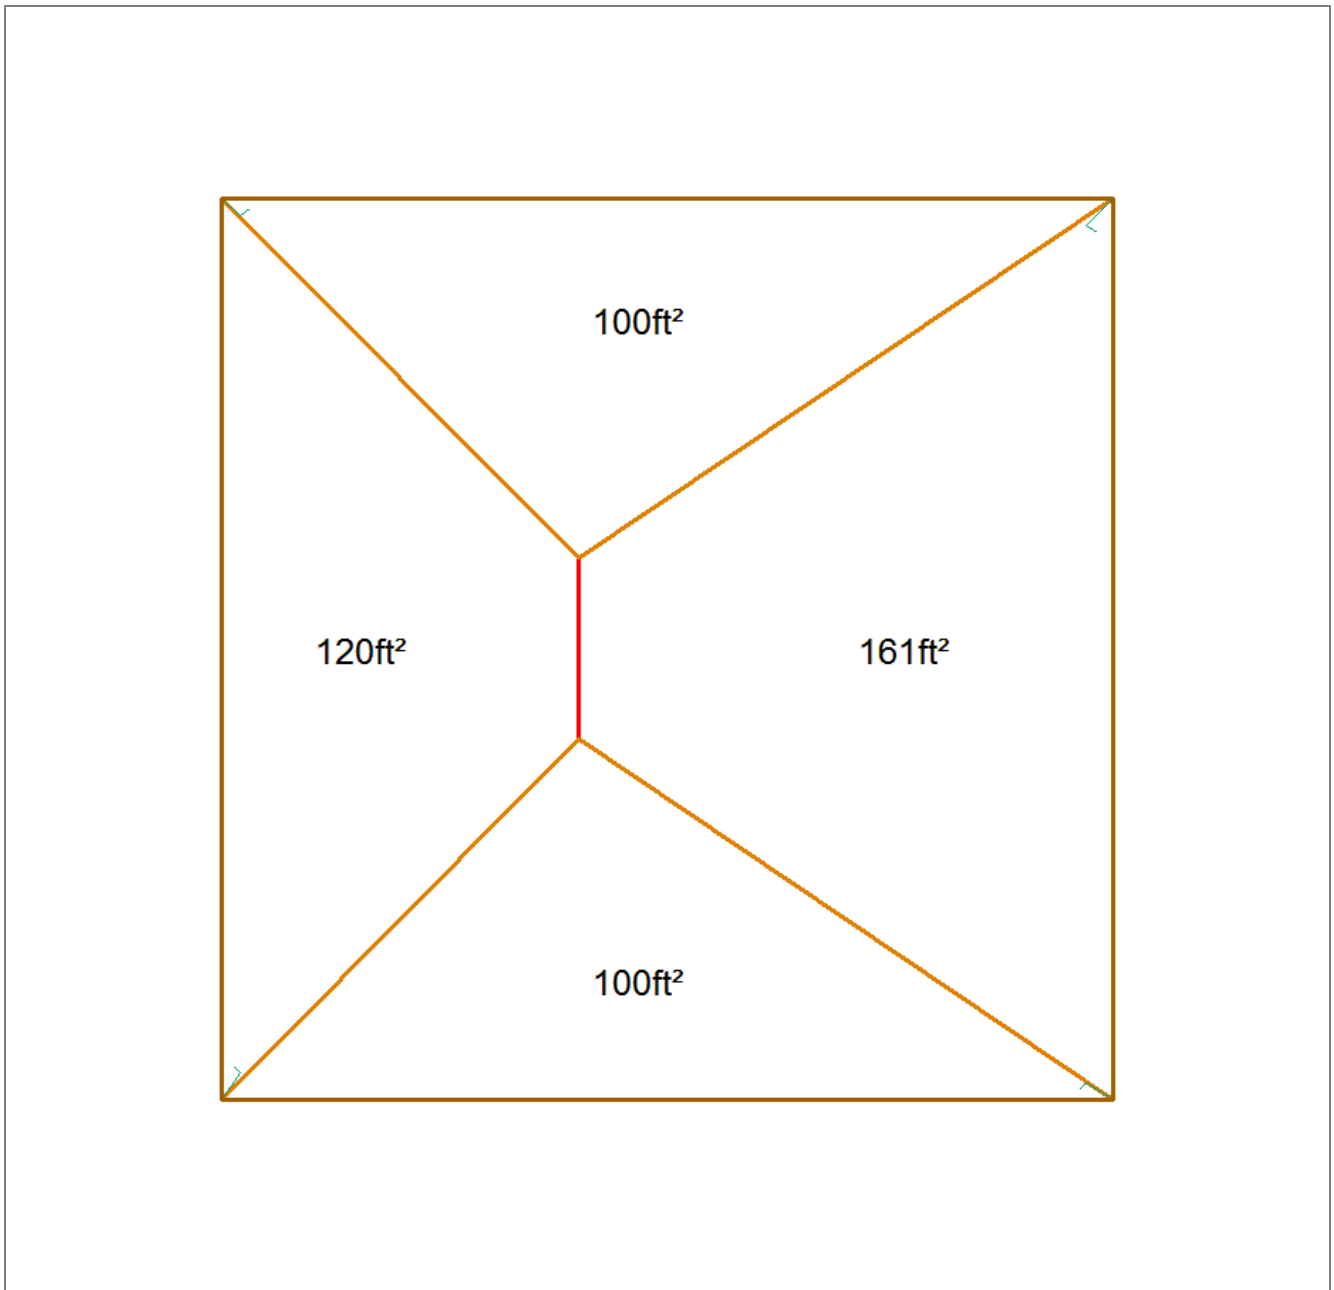

Estimate For



ABC SUPPLY #338 ORONOCO

3750-85TH ST NW
ORONOCO, MN 55960
Email: fred.willetts@abcsupply.com
Phone: 507.367.2685
Date: 8 April 2016


metal sales
manufacturing corporation



Roof Take-Off

Job: Example Report

Panel Layout Diagram

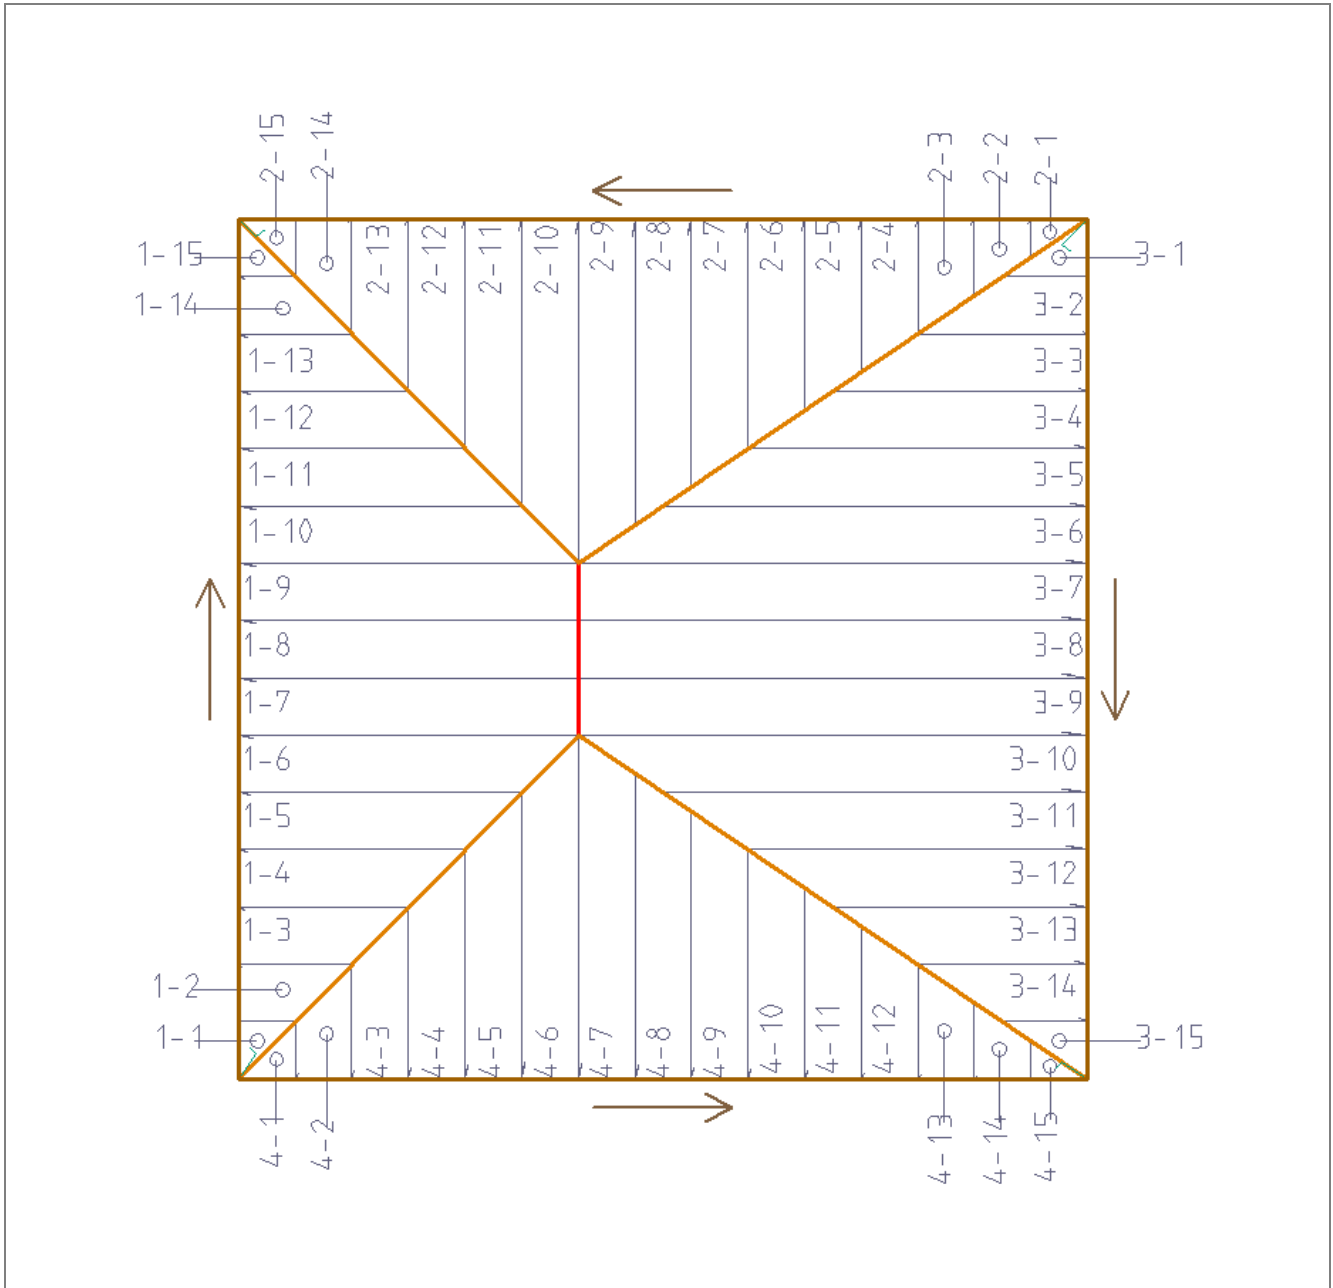

Estimate For



ABC SUPPLY #338 ORONOCO

3750 - 85TH ST NW
ORONOCO, MN 55960
Email: fred.willetts@abcsupply.com
Phone: 507.367.2685
Date: 8 April 2016

metal sales
manufacturing corporation



Section Report

Job: Example Report

Panel Material(s)

MSMC, 2735141, Magna-Loc 90 (Flat), ACG, 24.00, 16.0

Panel Length(s)

363.68 l/f

Panel Area(s)


484.90 ft²

Panel Quantity(s)

43 panels

Total Roof Area

481.00 ft²

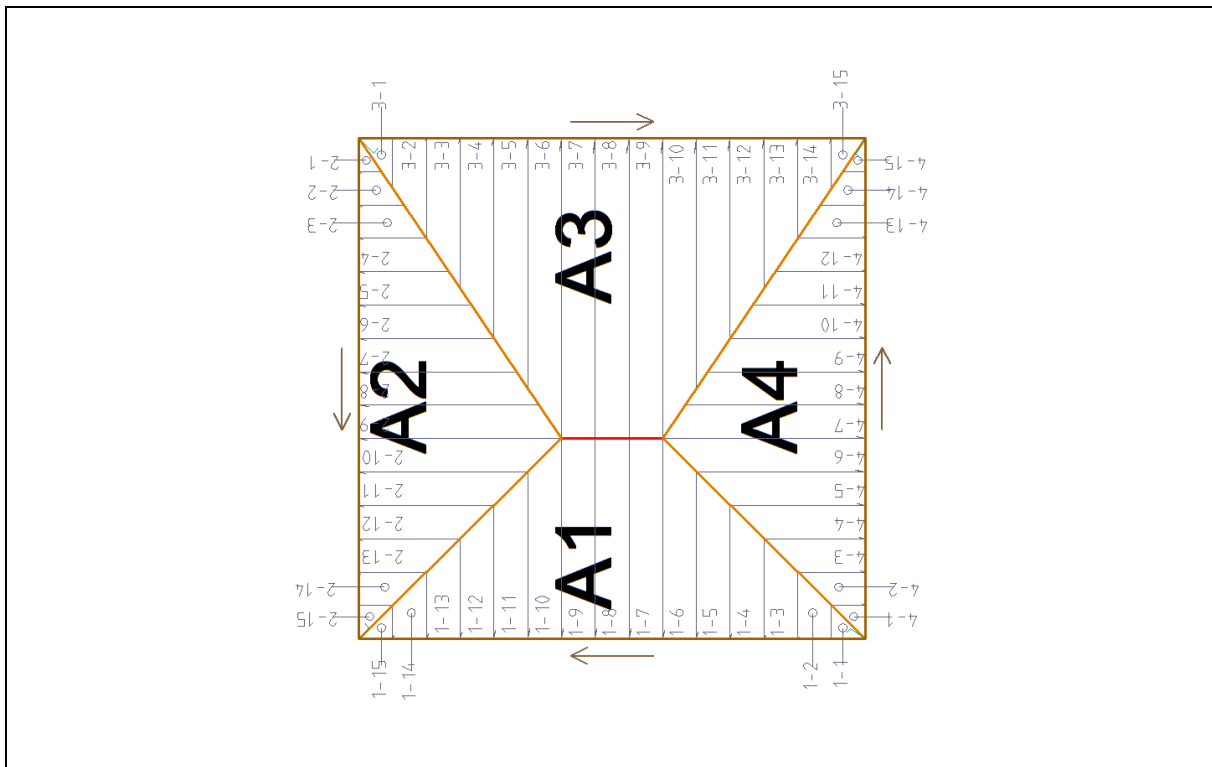

Section A - 2735141, Magna-Loc 90 (Flat), ACG, 24 Ga.

Surface Area = 481.00 Sq. Ft.

Estimate For



ABC SUPPLY #338 ORONOCO


3750 - 85TH ST NW
 ORONOCO, MN 55960
 Email: fred.willetts@abcsupply.com
 Phone: 507.367.2685
 Date: 8 April 2016

metal sales
 manufacturing corporation



Section Report

Job: Example Report

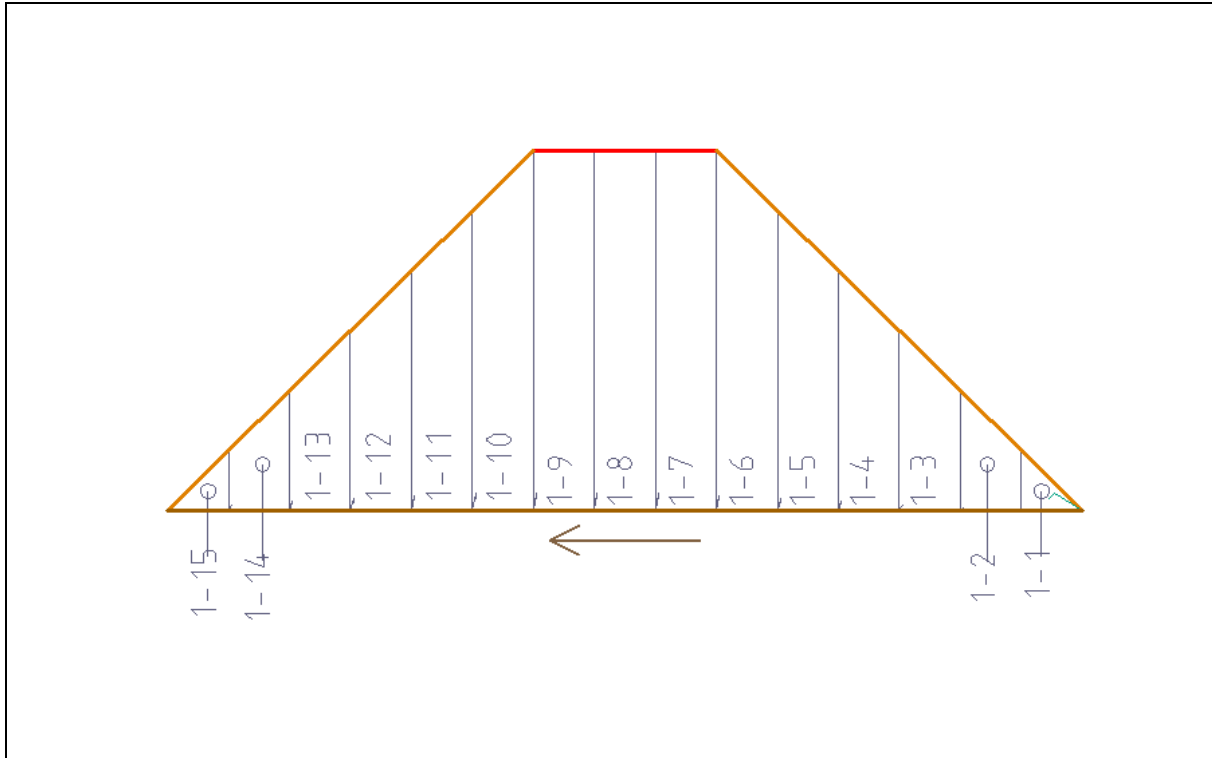

Plane A1 - 120.00 Sq. Ft.

Qty	Linear Feet	Total Lin. Feet	Qty	Linear Feet	Total Lin. Feet
5	10' 0"	50' 0"	2	6' 8 1/8"	13' 4 1/8"
2	8' 4 1/8"	16' 8 1/8"	3	5' 0"	15' 0"
SubTotal	12	Panels			95' 0 1/4"

Minimum Panel Length Breakdown

- 1 / 5' above made up of 1/5'.
- 1 / 5' above made up of 1/3' 4 1/8", 1/1' 8 1/8".
- 1 / 5' above made up of 1/1' 8 1/8".

Estimate For



ABC SUPPLY #338 ORONOCO


3750 - 85TH ST NW
 ORONOCO, MN 55960
 Email: fred.willetts@abcsupply.com
 Phone: 507.367.2685
 Date: 8 April 2016

metal sales
 manufacturing corporation



Section Report

Job: Example Report

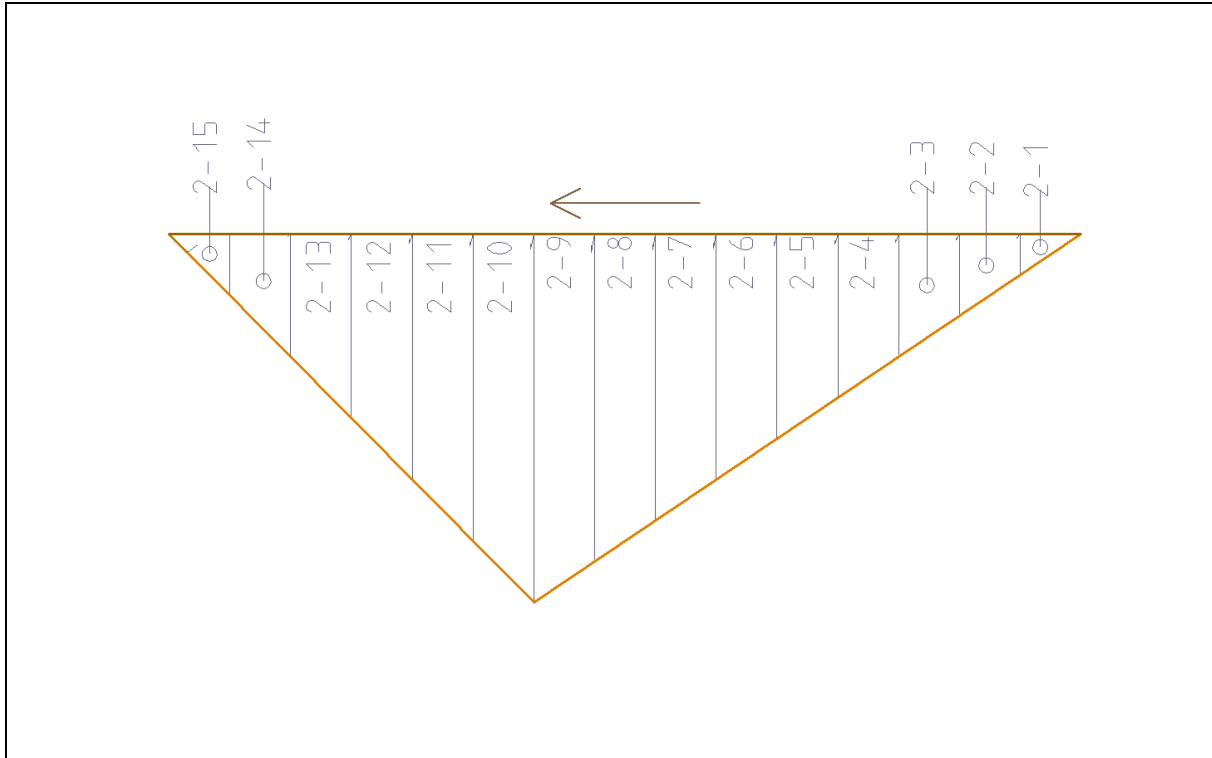

Plane A2 - 100.00 Sq. Ft.

Qty	Linear Feet	Total Lin. Feet	Qty	Linear Feet	Total Lin. Feet
2	10' 0"	20' 0"	2	6' 8 1/8"	13' 4 1/8"
1	8' 10 7/8"	8' 10 7/8"	1	5' 6 3/4"	5' 6 3/4"
1	8' 4 1/8"	8' 4 1/8"	4	5' 0"	20' 0"
1	7' 9 3/8"	7' 9 3/8"			
SubTotal	12	Panels			83' 11 1/8"

Minimum Panel Length Breakdown

- 1 / 5' above made up of 1/4' 5 1/2".
- 1 / 5' above made up of 1/3' 4 1/8", 1/1' 8 1/8".
- 1 / 5' above made up of 1/2' 2 3/4", 1/1' 8 1/8".

Estimate For



ABC SUPPLY #338 ORONOCO


3750 - 85TH ST NW
 ORONOCO, MN 55960
 Email: fred.willetts@abcsupply.com
 Phone: 507.367.2685
 Date: 8 April 2016

metal sales
 manufacturing corporation



Section Report

Job: Example Report

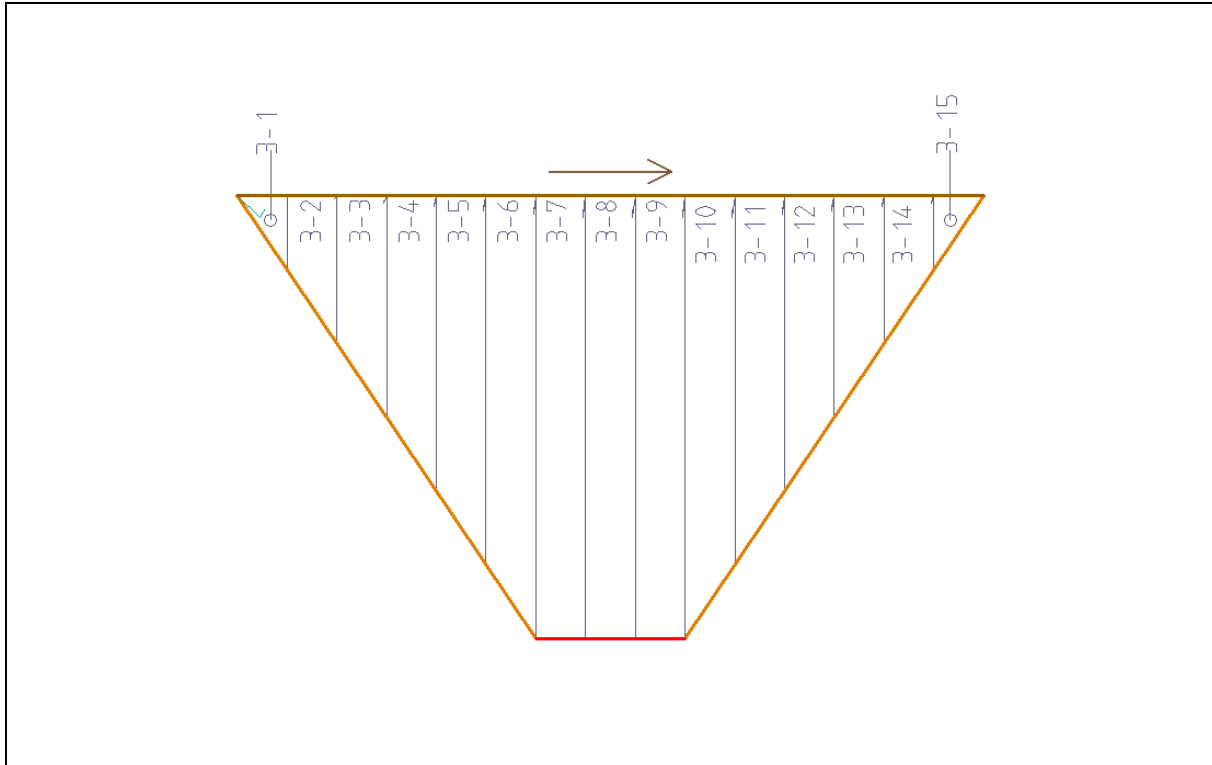

Plane A3 - 161.00 Sq. Ft.

Qty	Linear Feet	Total Lin. Feet	Qty	Linear Feet	Total Lin. Feet
5	13' 5 1/8"	67' 1 3/8"	2	6' 8 5/8"	13' 5 1/4"
2	11' 2 1/4"	22' 4 1/2"	2	5' 0"	10' 0"
2	8' 11 1/2"	17' 10 7/8"			
SubTotal	13	Panels			130' 9 7/8"

Minimum Panel Length Breakdown

1 / 5' above made up of 1/4' 5 3/4".

1 / 5' above made up of 2/2' 2 7/8".

Estimate For



ABC SUPPLY #338 ORONOCO


3750 - 85TH ST NW
 ORONOCO, MN 55960
 Email: fred.willetts@abcsupply.com
 Phone: 507.367.2685
 Date: 8 April 2016

metal sales
 manufacturing corporation



Section Report

Job: Example Report

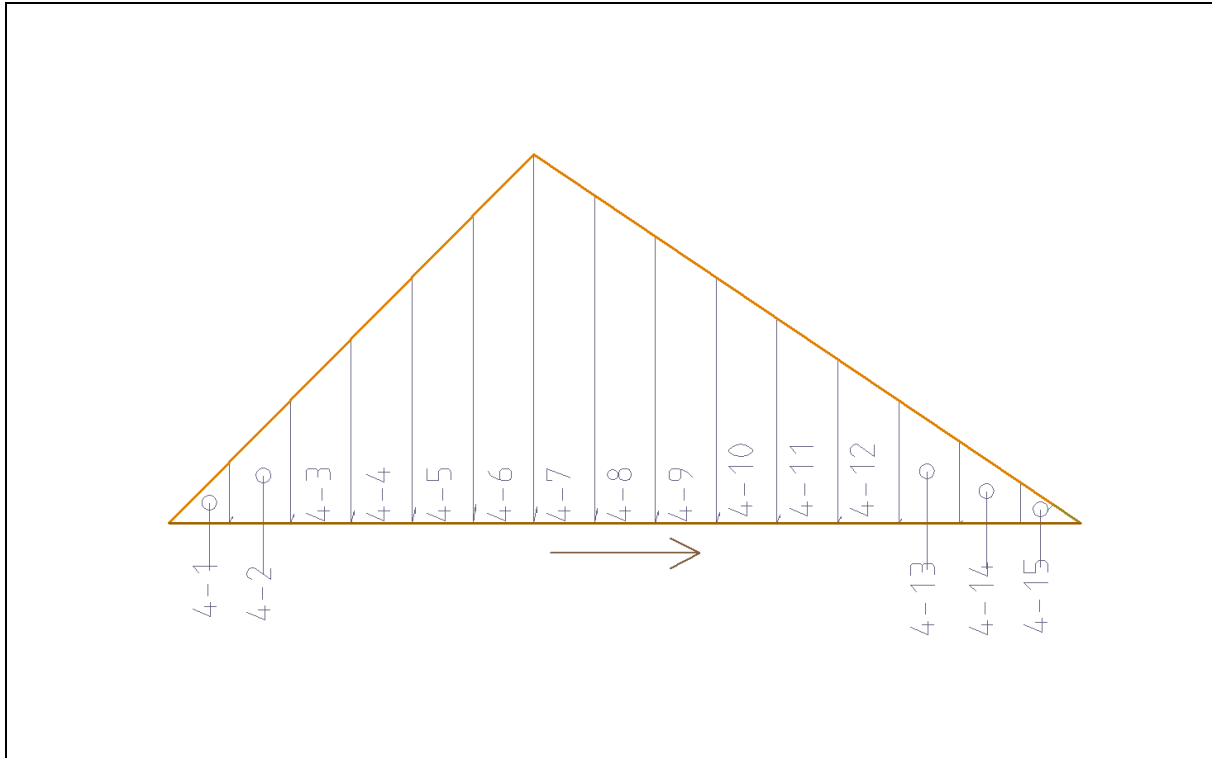

Plane A4 - 100.00 Sq. Ft.

Qty	Linear Feet	Total Lin. Feet	Qty	Linear Feet	Total Lin. Feet
2	10' 0"	20' 0"	2	6' 8 1/8"	13' 4 1/8"
1	8' 10 7/8"	8' 10 7/8"	1	5' 6 3/4"	5' 6 3/4"
1	8' 4 1/8"	8' 4 1/8"	4	5' 0"	20' 0"
1	7' 9 3/8"	7' 9 3/8"			
SubTotal	12	Panels			83' 11 1/8"

Minimum Panel Length Breakdown

- 1 / 5' above made up of 1/5'.
- 1 / 5' above made up of 1/4' 5 1/2".
- 1 / 5' above made up of 1/3' 4 1/8", 1/1' 8 1/8".
- 1 / 5' above made up of 1/2' 2 3/4", 1/1' 8 1/8".

Estimate For



ABC SUPPLY #338 ORONOCO

3750 - 85TH ST NW
 ORONOCO, MN 55960
 Email: fred.willetts@abcsupply.com
 Phone: 507.367.2685
 Date: 8 April 2016

metal sales
 manufacturing corporation



Section Report

Job: Example Report

Trim Summary

Flashing / Trim	Qty	UOM	Bend Angle	Product Code
SSR Ridge, ACG	1	PIECES	116.57°	5775141
Magna-Loc Sculptured Eave, ACG	7	PIECES	126.87°	5783541
Magna-Loc Sculptured Eave, ACG	3	PIECES	116.57°	5783541
SSR Gutter Drip, ACG	7	PIECES	126.87°	5778141
SSR Sculptured Gutter, ACG	7	PIECES	126.87°	5780841
SSR Gutter Drip, ACG	3	PIECES	116.57°	5778141
SSR Sculptured Gutter, ACG	3	PIECES	116.57°	5780841
SSR Ridge, ACG	4	PIECES	135.69°	5775141
Magna-Loc Zee Closure, ACG	4	PIECES	135.69°	5782641
SSR Ridge, ACG	3	PIECES	129.79°	5775141
Magna-Loc Zee Closure, ACG	3	PIECES	129.79°	5782641

Accessory Summary

Accessory / Fastener	Qty	UOM	Product Code
48" Back-Up Channel	30.43	EACH	4923640
Double Bead Tape Sealant	20.58	EACH	6403899
Tube Sealant 10.3 oz.	7.45	EACH	6402829
16" Magna-Loc End Dam	6.00	EACH	4925010
1 3/8" Eave Plate (High)	16.00	EACH	4923845
SSR Gutter Support	30.40	EACH	5781441
SSR Sculptured Gutter End (Left)	0.80	EACH	5781241
SSR Sculptured Gutter End (Right)	0.80	EACH	5781341
SD N/W 1"	414.00	BAGS/BOXES	8242000
Stitch XL 7/8"	422.00	BAGS/BOXES	8236800
Pop Rivet 1/8"	179.00	BAGS/BOXES	8240901
Dekfast 8"	78.00	BAGS/BOXES	8242206
SD XL 1-1/4"	676.00	BAGS/BOXES	8251200
Self Driller N/W 1-1/2"	484.90	BAGS/BOXES	8249300

Extras Summary

Extra Item	Qty	UOM	Product Code
Touch Up Paint	1.00	EACH	66001__
Tube Sealant	5.77	EACH	64028__